

HER 筒夾刀把

HER COLLET CHUCK



Balancing / 動平衡


Dimensions / 尺寸標示

G6.3

Max.30,000 RPM
Or $U \leq 1\text{mm}$

Option / 選配
G2.5

Max.30,000 RPM
Or $U \leq 1\text{mm}$

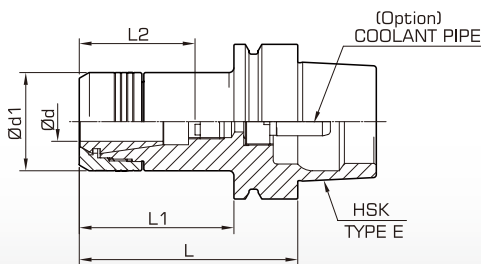

page.146

page.144

page.120

page.149



Nut
螺帽



Screw
調整螺絲



Collet
筒夾



Wrench
扳手

Order No. 訂購編號		Range 夾持範圍	Ød Ød1	L	L1	Tool Clamping Depth L2 刀具夾持深度				
HSK40E	HER16-060	1.0~10.0	30	60	40	max39.5	CAP-HER16	-	ER16-HP	PHS-20-R0300
	HER20-080	1.0~13.0	32	80	60	32~41	CAP-HER20	ER-M14	ER20-HP	PHS-20-R0320
	HER25-080	1.0~16.0	40	80	60	35~42	CAP-HER25	ER-M18	ER25-HP	PHS-20-R0400
HSK50E	HER16-100	1.0~10.0	30	100	74	29~58	CAP-HER16	ER-M11	ER16-HP	PHS-20-R0300
	HER20-100	1.0~13.0	32	100	74	32~56	CAP-HER20	ER-M14	ER20-HP	PHS-20-R0320
	HER25-100	1.0~16.0	40	100	74	35~56	CAP-HER25	ER-M18	ER25-HP	PHS-20-R0400
	HER32-100	2.0~20.0	50	100	74	41~55	CAP-HER32	ER-M22	ER32-HP	PHS-20-R0500

Remarks / 備註

- 需配合 3μ HP 筒夾 With 3μ HP Grade Collet
- 若需搭配中心出水管，請參考 page.145 規格表
- 若需出水型刀把，請參考 page.26 選用說明
- 筒夾夾持為一對一整數值

Applications / 應用



Drilling
鑽孔



Reaming
鉋孔



Endmilling
銑削



Tapping
攻牙